

Ključ nasadni 1/4", 6 kotni

188/2 6p



Profili




standard

ISO 2725-1

Atributi izdelka

- material: Premium Flex krom vanadijevo jeklo
- kovan, v celoti poboljšán
- površinska zaščita: kromiran s trivalentnim kromom po ISO 1456:2009
- v celoti izdelan v skladu s standardom ISO 2725-1

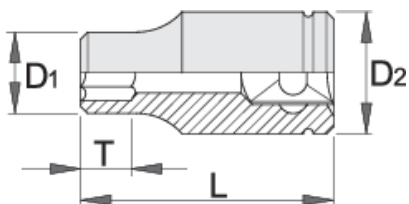

		L	D1	D2	T		
600815	4	25	6.8	11,9	5	15	
600816	4.5	25	7.1	11,9	5	15	
600817	5	25	8	11,9	5	15	
600818	5.5	25	8.3	11,9	5	15	
600819	6	25	9.3	11,9	5	15	
600820	7	25	10,5	11,9	5	15	
600821	8	25	11,9	11,9	5	15	
600822	9	25	12,9	12,9	8	15	
600823	10	25	13,9	13,9	8	39	
600824	11	25	15,9	15,9	8	39	
603130	12	25	16,9	16,9	8	39	
600825	13	25	17,9	17,9	10	39	
603131	14	25	19.7	19.7	10	39	

* Slike proizvodov so simbolične. Vse dimenzije so v mm, masa v g. Vse navedene dimenzije lahko odstopajo v tolerančnih merah.

Frequently asked questions

Nasadni ključ sem priklopil na pnevmatsko orodje, in je počila stena. Kaj bi lahko bilo narobe?
 Za uporabo s pnevmatskimi vijačniki je obvezna uporaba Impact nasadnih ključev.